


LINX Special adherence inks

The Linx range of special adherence inks for CIJ printers addresses the needs of applications where production processes may challenge the adherence or durability of other inks.

For a full profile of each ink, including printer compatibility, refer to the 'Summary of the Linx range of dye-based inks' datasheet.

■ Black plastic-film 1016	■ Black dry glass 1065
■ Black wet process 1055	■ Black bottling 1058
■ Black wet process 1056	■ Yellow bottling 1088
■ Black bottling 1058	■ Black PE 1130
■ Black oil-penetrating ink 1062	■ Black food-packaging 2250
■ Black grease-penetrating ink 1063	

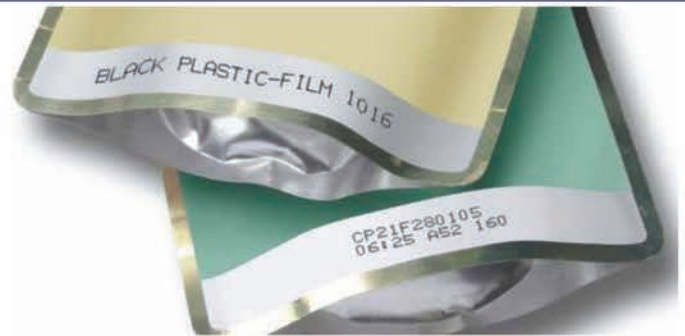

■ Black plastic-film 1016

A fast-drying ink which offers outstanding adhesion to OPP and BOPP materials, as well as other plastics which are traditionally difficult to code onto, such as polypropylene, polyethylene, and nylon.



■ Black wet process 1055

An ink that resists water and can be applied through a thin layer of moisture. It is water-resistant when dry and therefore suitable for cold-fill bottling, frozen foods, and products that will be soaked or rinsed following coding.



■ Black wet process 1056

An ink that resists water and can be applied through a thin layer of moisture. It is water-resistant when dry and therefore suitable for cold-fill bottling, frozen foods, and products that will be soaked or rinsed following coding. A stronger colour than 1055 it requires a stronger caustic wash to remove.



■ Black bottling 1058

Penetrates condensation making it ideal for wet bottle applications. Provides good print quality with a fast drying time, and is also suitable for high-humidity environments.



■ Black oil-penetrating ink 1062

Prints effectively through light layers of oil onto plastics, metal, glass, and waxy surfaces including OPP. Good for both food and light engineering applications.



Special adherence inks

LINX



■ Black grease-penetrating ink 1063

Provides excellent adhesion and contrast on substrates with a light oily or greasy film, for example, flexible food packaging containers, or where the code will be exposed to oil later in the process. Also suitable where a light layer of condensation is present.



■ Black dry glass 1065

Provides outstanding adhesion, legibility, and rub resistance on dry glass and PET. Ideal for fast-moving food processing environments.



■ Black bottling 1068

Fast-drying ink that provides improved code legibility specifically on glass with superior adhesion performance after ice water immersion and refrigeration. Codes are removable for returnable glass bottles.



■ Yellow bottling 1088

Fast-drying yellow ink that provides excellent adhesion on glass. Keeps adhesion in cold-room condensation conditions. Codes are removable for returnable glass bottles.



■ Black PE 1130

Fast-drying ink adheres extremely well to polyethylene, as well as other plastics which are traditionally hard to code onto, such as nylon and some types of polypropylene.



■ Black food-packaging 2250

Alcohol-based ink with a low odor which adheres well to a range of substrates, including most plastics. Ketone and chromium-free it also meets USDA requirements for incidental contact with meat and poultry.

packtronic.co.za

Packtronic Head Office (JHB)

Email: enquiries@packtronic.co.za | Phone: +27 11 956 6692

Packtronic Winelands (Pty) Ltd. (CPT)

Email: salesct@packtronic.co.za | Phone: +27 21 518 0888



INK FEATURES	INK / SOLVENT BASE	DRYING TIME	RECOMMENDED LINX SOLVENT
Black plastic-film 1016	MEK	1-2 seconds	1506
Black wet process 1055	MEK	1-5 seconds	1555
Black wet process 1056	MEK	1-5 seconds	1555
Black bottling 1058	MEK	1-3 seconds	1558
Black oil-penetrating 1062	MEK	1-2 seconds	1505
Black grease-penetrating 1063	MEK	1-2 seconds	1563
Black dry glass 1065	MEK	1-2 seconds	1565
Black bottling 1068	MEK	1-2 seconds	1590
Yellow bottling 1088	MEK	1-2 seconds	1588
Black PE 1130	MEK	1-2 seconds	1530
Black food-packaging 2250	Ethanol	2-4 seconds	2750 or 2502



Quality assurance

It is always recommended that only Linx continuous ink jet inks and solvents are used in Linx printers, as substitutes can affect printer performance or cause printer failure.

Linx inks and solvents are formulated specifically for use in Linx printers to ensure performance and reliability.

They are manufactured to certified and verifiable ISO 9001 quality procedures.

All raw materials are screened and audited to comply with new legislation to ensure a continuously safe and legal supply.

Ink handling guidelines

Linx takes great care to ensure that none of their CIJ inks and solvents are classified as 'Toxic to Health' or 'Environmentally Damaging'.

Details of safety precautions for handling these fluids can be found on the relevant Safety Data Sheets.

Ink and solvent storage and use

Storage:
Between +15°C and +25°C

Operating temperature:
Between +5°C and +45°C

Ink overviews

For advice on individual applications, please consult Linx or your local Linx Distributor.

