

R20e & REACHe

Cost Effective Touch Screen Controller With Dual Brady TIJ Printheads



Features

Wide Range Of Print Types

- Text, Counter
- Box/Lot
- Datetime
- Expiry Date
- Julian Date
- Shiftcode
- Image
- Database

ID & 2D Barcodes (Code 11, Code 39, Code 128, EAN, QR, Datamatrix, GS1 Datamatrix)

External Connections

- Built in Sensor, DVI Port
- External Sensor, Encoder and Alarm Beacon

Advance Features

- Free design in template up to 1.06 inch (27mm)
- Real-time Printing
- WYSIWYG (what you see is what you get)
- Data Upload, Backup & Recovery via USB
- POD (Print online data) Integrate with other devices (PLC, Camera, Checkweigher) via RJ45.

Print Languages (27 Languages)

English (default), Simplified Chinese (PRC), Traditional Chinese (ROC), Czech, Spanish, Greek, Hindi, Hungarian, Hebrew, Farsi, Japanese, Korean, Urdu, Portuguese, Russian, Arabic, Slovak, Thai, Vietnamese, Turkish (and others)

System Languages (33 Languages)


English (default), German, Vietnamese, Korean, Russian, Simplified Chinese, Turkish, Portuguese, Spanish, Polish, Greek, Italian, Hebrew, Thai, French, Traditional Chinese ROC, Arabic, Czech, Dutch, Indonesian, Japanese, Bengali, Bulgarian, Croatian, Albanian, Finnish, Hungarian, Macedonian, Romanian, Serbian, Slovenian, Slovak, Ukrainian

R20e REACHe – Technical Specifications & Features


Technical Specifications

Printing Technology	Brady TIJ
Controller Dimensions	195 x 148 x 51mm
Printhead Dimensions	135.9 x 64.57 x 84.65mm
Controller Weight	1,215g
Print Head Weight	338.79g
Display	7" LCD Resistive Touch Screen
Power Supply	DC 24V 2.5A, 60W
Resolutions	Max 300 x 600 DPI
Print Speed	45m/min @ 300x200 DPI
Density	3 levels
Throw Distance	Up to 10mm
Data Cable	DVI 1.8m Standard
Printable Height	Maximum 27mm (2 Printheads)
Template Length	1.5m @ 300x200 DPI
Database	TXT, CSV, SQL, SQLite and MySQL
Printable Characters	Windows True Fonts
Ink Types	Solvent Based, Water Based
Operating Environment	Temperature 10 - 40°C, Humidity 40 - 80%, Non-Condensing


Dimensional Drawings

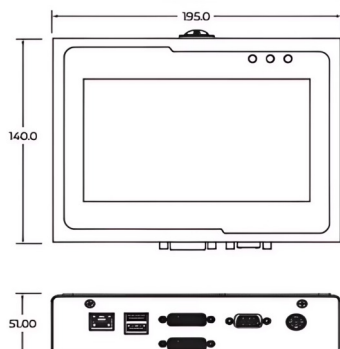

R20e Controller — 195.0mm (W) × 140.0mm (H) × 51.00mm (D)

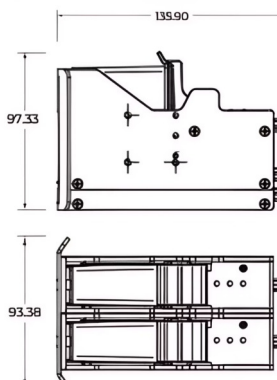

REACHe Printhead (Stitched) — 135.90mm (W) × 97.33mm (H) × 93.38mm (D)

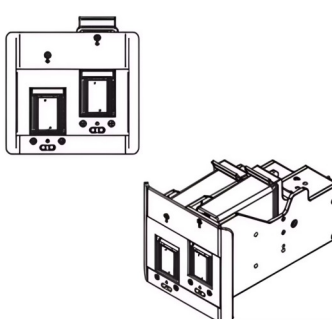

REACHe Printhead (Stitched) — Isometric View